

SPECIFICATION

Product name : LAS-80H-470A

Release date : 2023/4/27

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

Features

- Class I type for insulation
- Input voltage range:200-240V ~ 50/60Hz
- Efficiency 95% (Typ.)
- Constant current output ,with power limitation for control mode
- Version 1: Half glue (IP42); (optional IP65)
Version 2: bare plate construction (XP series)
- Surge level:
differential mode : 4kV
common mode :6kV
- guaranteed Lifetime : 5 year warranty for half glue; 3 year warranty for bare plate



Applications

Industrial lighting、Venue lighting

Model list

Model NO.	Rated Input voltage	Max Output power	Output voltage	The default current	Eff.
LAS-80H-470A	200-240V 50/60Hz	80W	410-470Vdc	0.17A	≥95%
LAS-80H-470A-XP	200-240V 50/60Hz	80W	410-470Vdc	0.17A	≥95%

Note:

1. Test conditions: Ta=25℃, under 230Vac input,after running for 30 minutes with full load .

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

Input characteristics

Parameter	Min	Typ.	Max	Remark
Rated input voltage	-	230Vac	-	-
Input voltage range	200Vac	-	240Vac	-
Rated frequency range	-	50/60Hz	-	-
Power factor	0.95	-	-	@230Vac input ,with full load
T.H.D.	-	-	15%	@230Vac input ,with full load
Input current	-	-	0.45A	@180Vac input ,with full load
Inrush current	-	-	70A	230Vac, cold start (25°C)

Output characteristics

Parameter	Min	Typ.	Max	Remark
Rated current	-	0.17A	-	@230Vac input ,with full load
LAS-80H-470A	-	0.17A	-	
LAS-80H-470A-XP	-	-	-	-
Output current range	0.15A	-	0.20A	@230Vac input ,with full load
LAS-80H-470A	-	-	-	
LAS-80H-470A-XP	-	-	-	-
Output voltage range	410V	-	470V	-
LAS-80H-470A	-	-	-	@230Vac input ,with full load
LAS-80H-470A-XP	-	-	-	
Rated power@230Vac)	-	80W	-	@230Vac input ,with full load
LAS-80H-470A	-	80W	-	
LAS-80H-470A-XP	-	-	-	-
No-load voltage	-	-	520V	-
LAS-80H-470A	-	-	-	
LAS-80H-470A-XP	-	-	-	

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

Output characteristics

Parameter	Min	Typ.	Max	Remark
Efficiency@230Vac LAS-80H-470A LAS-80H-470A-XP	-	95%	-	@230Vac input ,with full load
Accuracy of output current	-5%	-	+5%	For constant-power range , with full load
Line regulation	-3%	-	+3%	full load
Load regulation	-3%	-	+3%	full load
Starting time	-	-	500ms	Full load@230Vac

Note: 1.The output current is limited by the input and output voltage, please refer to “I-V WORKING AREA” for details;

Protections

Protection	description
Over temperature protection	Could recover automatically; Bare plate test when the IC temperature is greater than 100 ± 3 C, the output power gradually decreases as the IC temperature increases.
Input under-pressure protection	When the input voltage is less than 180 Vac, the output power gradually decreases with the decrease of the input voltage.
Output overload protection	Overload protection is triggered when the load voltage is greater than 500 ± 5 Vdc; Protection mode: hiccup restart, which can be automatically restored after the load abnormal conditions are removed.
Output short circuit protection	Hiccup mode; it can be automatically restored after the abnormal conditions are removed.

Note:

1. Unless otherwise specified, all parameters should be measured at the condition of 230Vac (50Hz) input ,with rated load ,and ambient temperature of 25°C;
2. Including setting error, linear adjustment rate and load adjustment rate;

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

Environmental characteristics

Environmental categories	Parameter
Working temperature	-40 ~ +55℃@200-240Vac((Refer to "Service Life Curve"))
Safety case temperature	-40 ~ 90℃
Working humidity	20 ~ 95% RH,non-condensing
Storage temperature、humidity	-40~+80℃, 10 ~ 95% RH
Resistant to vibration	10 ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each
MTBF	230Khrs min. MIL-HDBK-217F (Ta=25℃)
Lifetime	50000 hours @230Vac,80% load, Tcase=75℃,.Refer to” Tcase VS Lifetime” curve for details.

Safety and EMC

Safety categories	Standard
Safety	GB19510.1、GB19510.14、EN61347-1、EN61347-2-13、IEC61347-1、IEC61347-2-13、AS/NZS61347.1、AS61347.2.13、EN 62384;
EMC	EN 55015、EN 61547、EN 61000-3-2、GB/T 17743、GB17625.1、EN 61000-3-3
Surge level	Differential mode L-N ±4KV(2Ω),common mode L, N-PE±6KV (12Ω) Refer toIEC61000-4-5 2014
High-pot test	I/P-PE :1.5KVac
Insulation impedance	I/P-PE:100MΩ / 500VDC; I/P-O/P:100MΩ / 500VDC / 25℃/ 70% RH
Leakage current	<5mA@230Vac

Note:

1.Attention! As a component of the whole, the EMC performance of the final product is not only decided by the driver, even if the driver is well-designed and fulfil all the required compliance. The final equipment manufacturers must re-qualify EMC Directive on the complete product.

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

I-V Working area


LAS-80H-470A

Load	Output						
Load working Voltage	410V	420V	430V	440V	450V	460V	470V
Io_MAX	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A
Po_MAX	69.7W	71.4W	73.1W	74.8W	76.5W	78.2W	80W


LAS-80H-470A-XP

Load	Output						
Load working Voltage	410V	420V	430V	440V	450V	460V	470V
Io_MAX	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A
Po_MAX	69.7W	71.4W	73.1W	74.8W	76.5W	78.2W	80W


Eff. VS Output voltage LAS-80H-470A

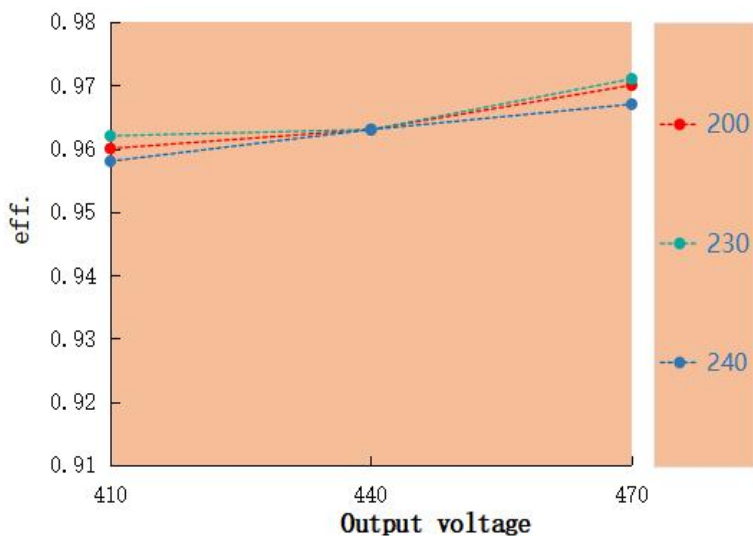


Eff. VS Output voltage LAS-80H-470A-XP

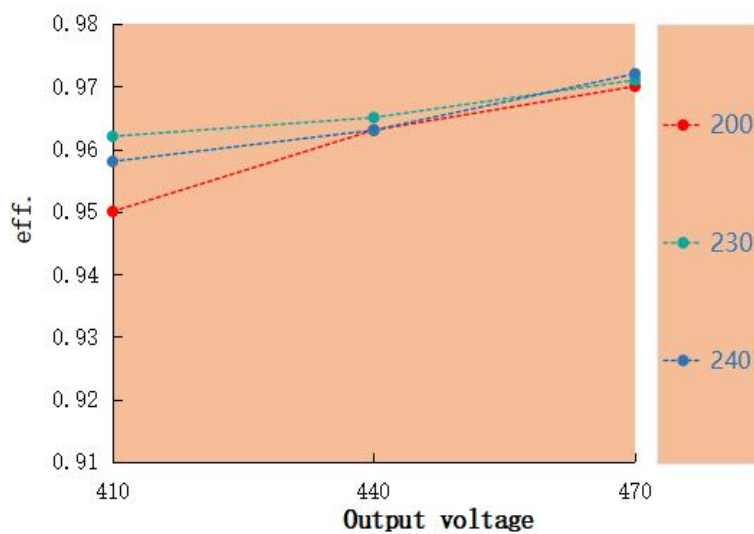


Power factor VS Input voltage LAS-80H-470A

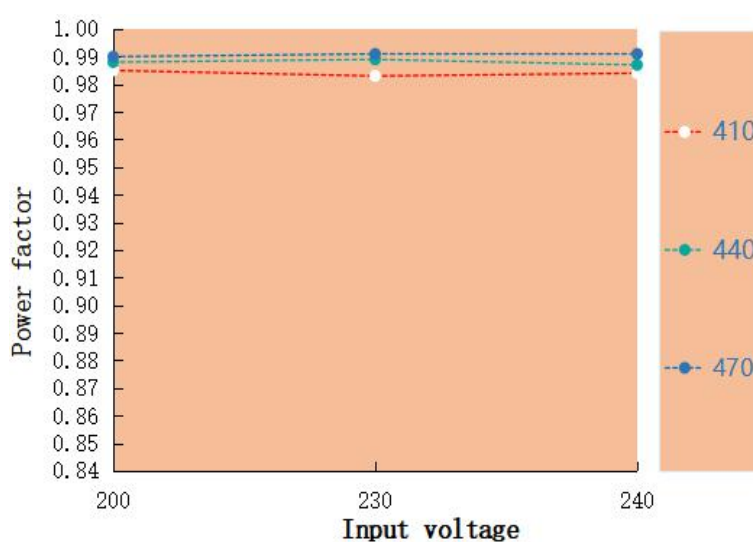


Power factor VS Input voltage LAS-80H-470A-XP


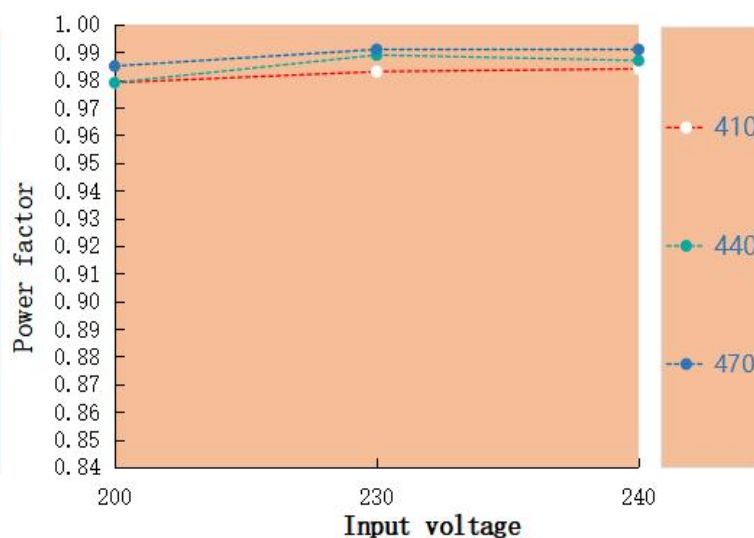


T.H.D. VS Output voltage LAS-80H-470A

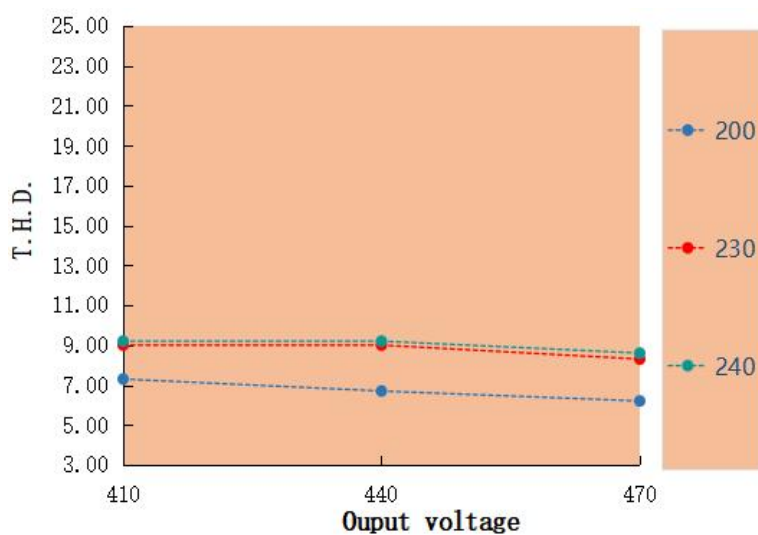


T.H.D. VS Output voltage LAS-80H-470A-XP

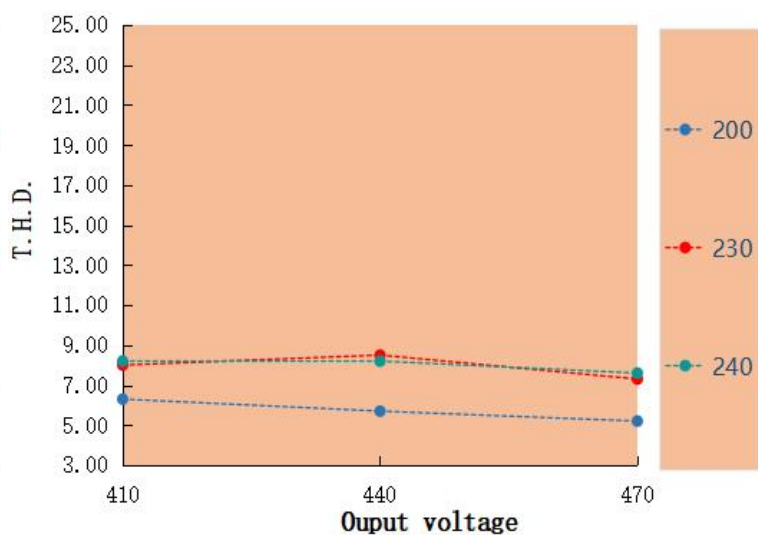

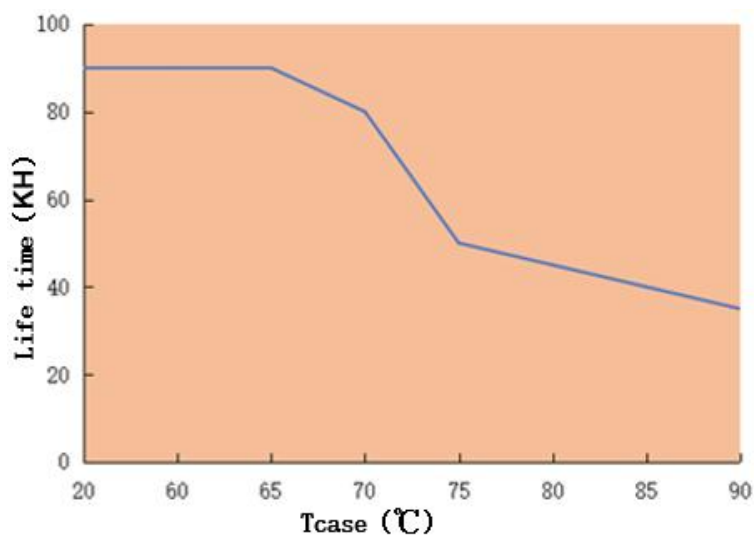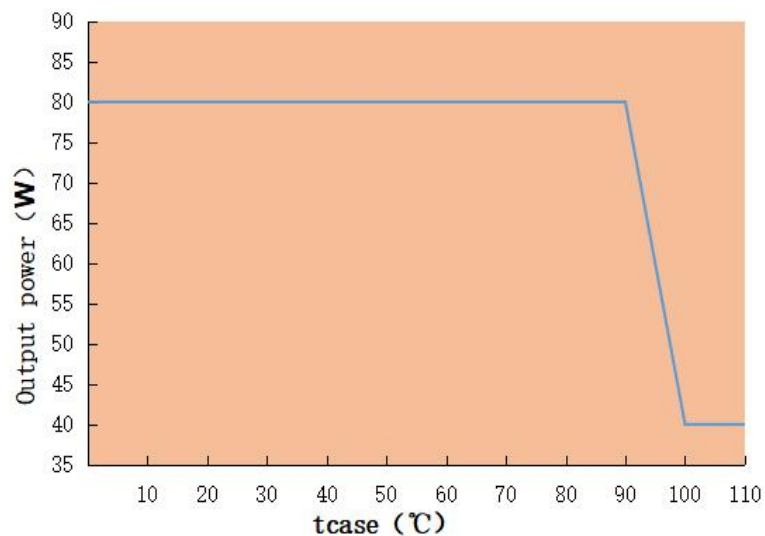Tcase VS Life time LAS-80H-470A

Output power VS Tcase LAS-80H-470A

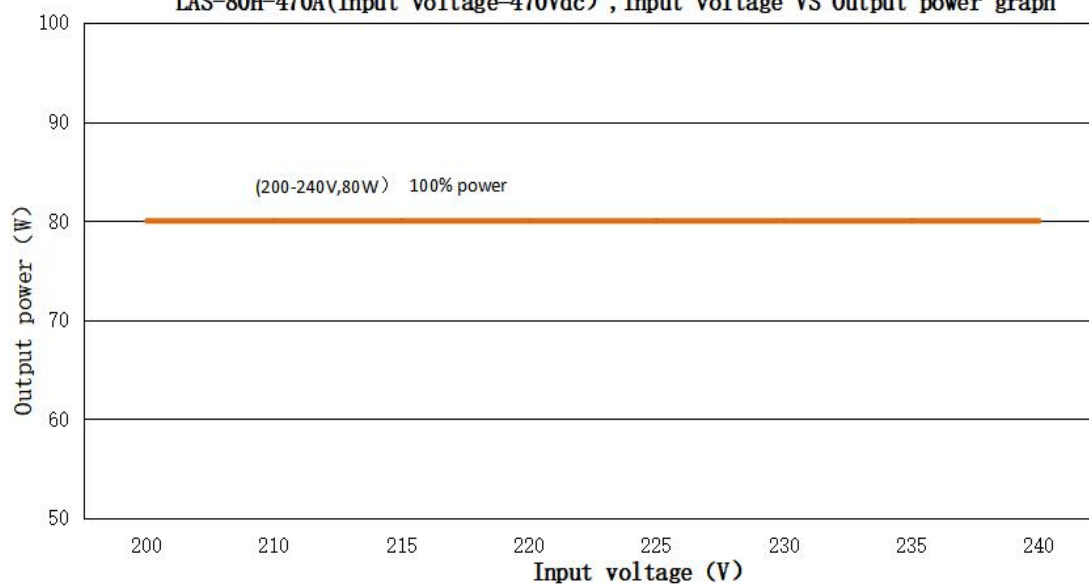
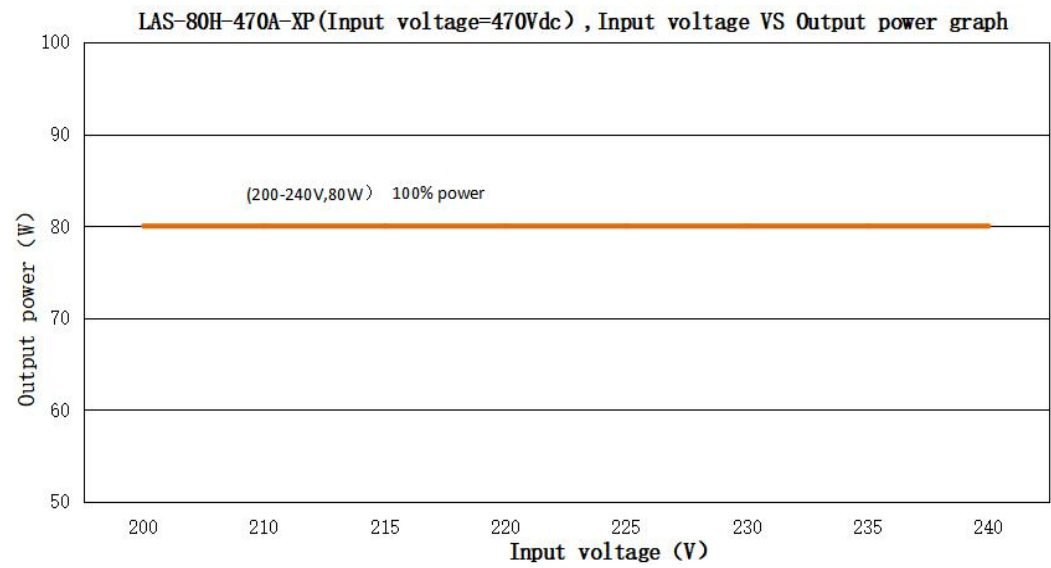
Output power VS Input voltage

LAS-80H-470A(Input voltage=470Vdc) , Input voltage VS Output power graph

LAS-80H-470A(Vdc=470Vdc, the rated output current & power under different input voltage)

Input Voltage	200Vac	210Vac	215Vac	220Vac	225Vac	230Vac	235Vac	240Vac
Io	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A
Po	80W	80W	80W	80W	80W	80W	80W	80W

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

Output power VS Input voltage



LAS-80H-470A-XP(Vdc=470Vdc, the rated output current & power under different input voltage)								
Input Voltage	200Vac	210Vac	215Vac	220Vac	225Vac	230Vac	235Vac	240Vac
Io	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A	0.17A
Po	80W	80W	80W	80W	80W	80W	80W	80W

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LAS-80H-470A Series	REV	V2.0

Version

DATE	DESCRIPTION	REV.	CHECK
2023.04.15	Initial version.	V1.0	
2023.04.27	Efficiency has been adjusted from 96% to 95%	V2.0	